

## MOBILEGO<sup>plus</sup>

### MOBILE FILTER UNIT WITH METAL TUBE ARM

The MobileGo<sup>plus</sup> is a mobile welding fume filter with built-in fan and a metal tube arm (KUA). It contains a disposable filter package.

Thanks to the four transport wheels (two of which are swivel casters with brake), the MobileGo<sup>plus</sup> is suitable for use in relatively small facilities or near sources of pollution without a fixed location.

The MobileGo<sup>plus</sup> is a basic extractor. It has been designed for the consumption of approx. 2 coils of solid wire or 15 kg/33 lbs of electrodes per month.



#### APPLICATIONS

The MobileGo<sup>plus</sup> is intended to be used for the following applications:

- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding
- grinding
- polishing
- finishing



#### SPECIFICATIONS

##### Physical dimensions and properties

Material (housing):	electro-zinc coated steel (according to DIN EN 10152)
• steel grade	• DC01+ZE
• steel grade no.	• 1.0330
Colour	yellow RAL 1004 grey RAL 7011
Weight (net), excl. arm	85,5 kg (188.5 lbs)
Mains cord:	
• type	• 3G1.5
• length	• 6 m (20 ft)

##### Extraction arm

Type	KUA
Material	metal tube
Diameter	Ø 160 mm (6.3 in.)
Length:	
• KUA-2	• 2 m (6.6 ft)
• KUA-3	• 3 m (9.8 ft)
Weight:	
• KUA-2	• 12 kg (26.5 lbs)
• KUA-3	• 15.5 kg (34.2 lbs)

##### Filters

Pre filter cassette:	
• material	• polyester
• filter surface	• 1 m <sup>2</sup> (10.8 ft <sup>2</sup> )
• filter class	• G2 according to EN 779
• washable	• no
HEPA filter cassette:	
• material	• glass fibre
• filter surface	• 26 m <sup>2</sup> (280 ft <sup>2</sup> )
• filter class	• HEPA E12 according to EN 1822:2009
• washable	• no

##### Welding fume class

W3	according to ISO 15012-1:2013
----	-------------------------------

##### Performance

Fan type	radial
Extraction capacity (incl. extraction arm)	max. 850 m <sup>3</sup> /h (500 CFM)
Fan speed	2800 rpm
Noise level (according to ISO 3746)	67 dB(A)

##### Electrical data

Power consumption	1,1 kW (1.5 HP)
Available connection voltages	• 115V/1ph/50Hz (115) • 115V/1ph/60Hz (116) • 230V/1ph/50Hz (215)
Motor design	IEC
Energy efficiency	<i>n.a. for single phase motors</i>
Plug:	Type:
• 115V/1ph/50Hz	• none
• 115V/1ph/60Hz	• none
• 230V/1ph/50Hz	• F

##### Ambient and process conditions


Process temperature:	
• min.	• 5°C (41°F)
• nom.	• 20°C (68°F)
• max.	• 70°C (158°F)
Max. relative humidity	90%
Suitable for outdoor use	no
Storage conditions	• 5-45°C (41-113°F) • relative humidity max. 80%

##### Scope of supply

Mobile filter unit – Extraction arm (pre-assembled) – Rotating flange – Arm swivel ring, incl. rubber collar – Extraction hood – Hood collar with safety mesh – Mounting material

Type	MobileGo <sup>plus</sup> /2m			MobileGo <sup>plus</sup> /3m		
Connection voltage	115V/1ph/50Hz	115V/1ph/60Hz	230V/1ph/50Hz	115V/1ph/50Hz	115V/1ph/60Hz	230V/1ph/50Hz
■ Order information						
Article no.	0000111453	0000111454	0000111452	0000111474	0000111475	0000111473
Number/package	1	1	1	1	1	1
■ Logistics data						
Gross weight	77 kg (170 lbs) incl. pallet			80 kg (176 lbs) incl. pallet		
Packing dimensions	800 x 1200 x 1750 mm (31.5x47.2x68.9 in.) incl. pallet			800 x 1200 x 2250 mm (31.5x47.2x88.6 in.) incl. pallet		
Max. number/pallet	2			2		
Harmonized Tariff Code	8421.39.2090			8421.39.2090		


DIMENSIONS

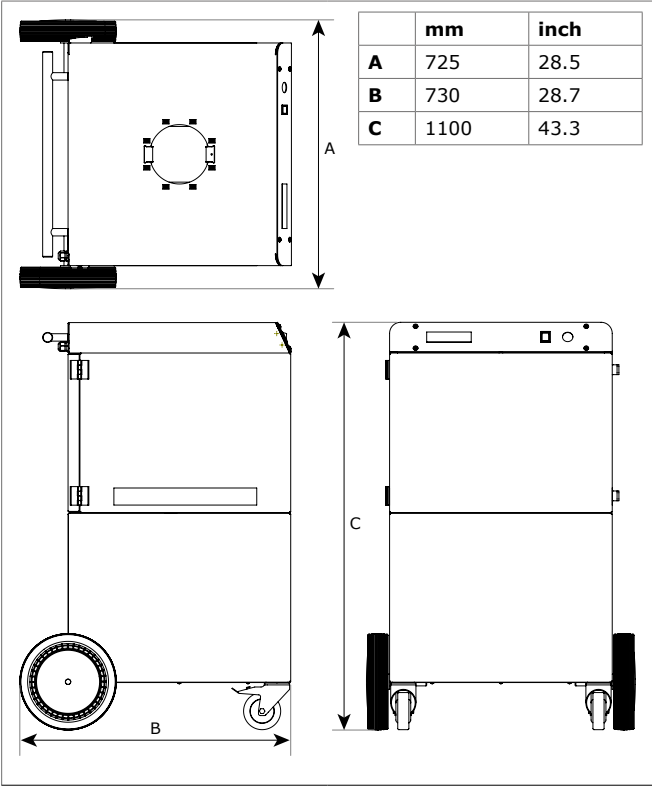



FEATURES & BENEFITS

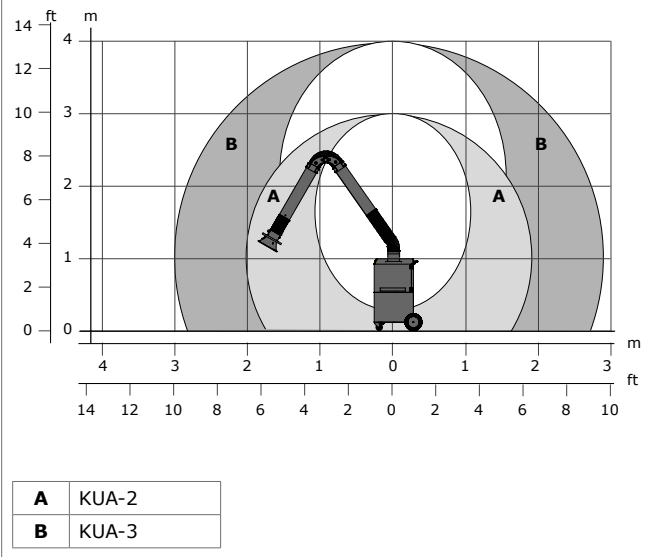

WORKING RANGE



APPROVALS/CERTIFICATES

	
	Directive 2011/65/EC (RoHS) valid as of 8 June 2011

**Application restrictions**  
Do **not** use the product for the following applications or in the following circumstances: polishing applications in combination with grinding, welding or any other application that generate sparks (fibres from polishing or abrasive flap disks are highly flammable and pose a high risk of filter fires when exposed to sparks) | aluminium laser cutting | oil mist | heavy oil mist in welding fume | arc-air gouging | extraction of aggressive fumes and gases (e.g. from acids, from alkaline, from soldering paste containing lithium) | extraction of hot gases (more than 70°C/158°F continuously) | grinding aluminum and magnesium | flame spraying | extraction of cement, saw dust, wood dust etc. | sucking cigarettes, cigars, oiled tissues and other burning particles, objects and acids | explosive environments or explosive substances/gases

Product type	<b>MobileGo<sup>plus</sup></b>
Article no.	<i>refer to Order information</i>
Product category	mobile filter units
Version	010317/C
Always check the latest version on <b>www.plymovent.com</b>	