



INDUSTRIAL VACUUM SYSTEMS

Product Group  
Industrial Vacuum Cleaners

VacPro 26  
VacPro 46



VacPro 26  
VacPro 26 M Atex 3D

VacPro 46  
VacPro 46 M Atex 3D




Professional industrial vacuum units  
for metal chips, fine dust and liquids



**wieland lufttechnik**  
Wetterkreuz 12  
91058 Erlangen  
Germany  
Phone +49 9131 60 67-0  
Fax +49 9131 60 44 01  
info@wieland-luft.com  
www.wieland-luft.com



Work shop cleaning



High speed dust extraction



Machine cleaning


## High tech filter system for the most difficult suction applications

High performance pocket filter with aerodynamically designed filter spreaders for metal chips, liquids and fine dust. Filter material according to dust class M (EN 60335-2-69).




## Superior suction performance, optimum handling

Side channel vacuum pump, 2.2 or 4 kW, three-phase motor for continuous operation, high vacuum for swarf, grease, oil, liquids, dust and for long suction distances (pipe work system).



The integrated cyclonic separator directs fine dust almost completely and liquids completely into the collection container without affecting the filter

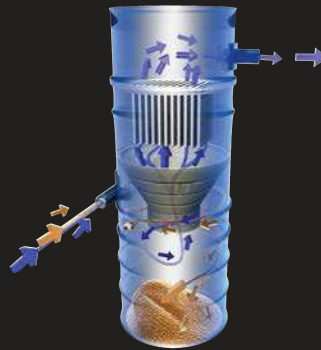

### All types have as standard equipment:

- mechanical pre-separator
- high performance pocket filter, dust class M
- pneumatic AirShock® filter cleaning device
- 50 liter collection container

## Pneumatic AirShock® filter cleaning as standard equipment

AirShock® filter cleaning



The AirShock® inflates the filter pockets instantaneously. Accumulated dust drops off and falls down into the collection container.

### Four types cover all applications. Make your choice:

	VacPro 26	VacPro 26 M Atex 3D	VacPro 46	VacPro 46 M Atex 3D
Three phase / continuous operation	✓	✓	✓	✓
Side channel vacuum pump	✓	✓	✓	✓
Suction inlet diameter, mm	50	50	60	60
Max. length of suction hose / suction line, m	15	15	25	25

### Technical Data

	Unit	VacPro 26	VacPro 26 M Atex 3D	VacPro 46	VacPro 46 M Atex 3D
Electric power	kW	2.2	2.2	4.0	4.0
Max. airflow	m³/h	340	340	460	460
Max. suction power	mbar	210	170	340	270
Collection drum	Liter	50	50	50	50
Filter surface of main filter	cm²	20000	20000	20000	20000
Dimensions (L x W x H)	mm	1102 x 750 x 1387	1102 x 750 x 1387	1102 x 750 x 1387	1102 x 750 x 1387
Voltage (50 Hz)	V	400 Δ	400 Δ	400 Δ	400 Δ
Weight approx.	kg	138	140	145	147
Fuse	Amp.	16	16	16	16
Noise level, without reflexions DIN 45635	dB(A)	65	65	69	69